

INSTALLATION INSTRUCTION FOR 6811-66/6811-84

For Wall Mount Light Fixtures

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig.1)

3. Position the circular strap (A) through the fixing holes onto the wall and make marks, drill pilot holes for wood screws (B) into the wall, then insert the plastic anchor (D) into the holes.
4. Secure circular strap (A) to outlet box (not provided) with outlet screws (C), then secure the outlet box with wood screws (B) into plastic anchors (D) in the wall.

NOTE: The holes of the circular strap with anchors must be upward.

CONNECTING THE WIRES (Fig. 2)

5. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap with the Green Screw provided.
6. Tuck these wire connections neatly into the wall junction box.

COMPLETING THE INSTALLATION (Fig.1)

7. Raise the mounting base (E) allowing for the mounting screws (F) to protrude through the holes on mounting base (E), and then secure with the mounting screws (F) by wrench.
 8. Place the glass (I) over the socket (G) and secure with the retaining ring (H).
 9. Install the proper light bulb for your fixture.
- DO NOT EXCEED THE SPECIFIED WATTAGE!**

Return the power to the junction box and test the fixture. Your installation is now complete.

Fig.1

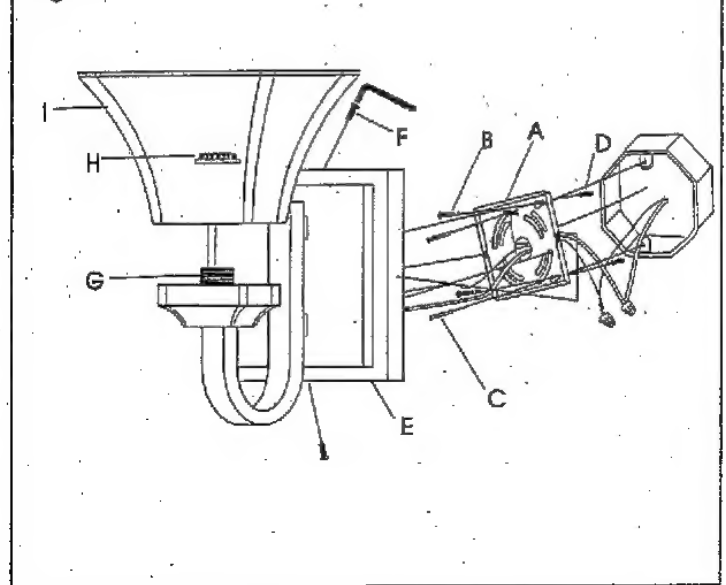


Fig.2

